



REVISIONS				
E.C.O.	REV.	DESCRIPTION	DATE	SIGNATURE
	1A	PROTOTYPE		
16156	A	CHANGED SLOTTED HOLES CENTER DISTANCE FROM 4.00" TO 3.5". RELEASED TO MANUFACTURING.		



DETAIL B
(SCALE 2:1)

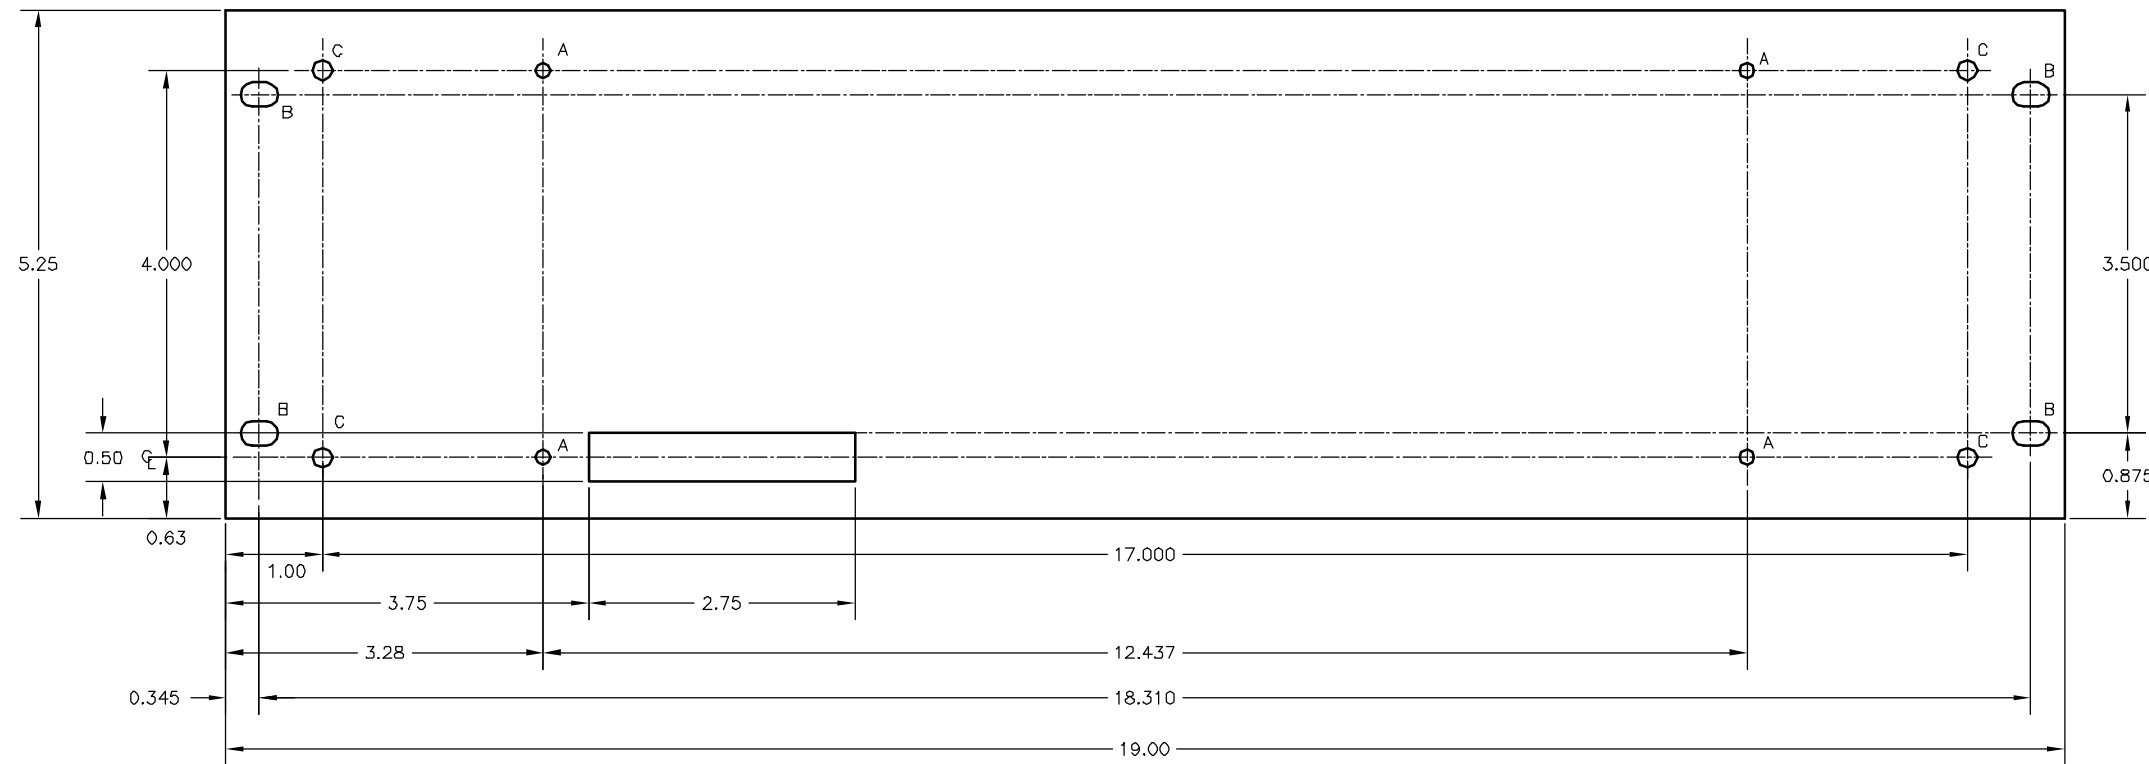

NOTES:

1. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES UNLESS OTHERWISE NOTED.
2. SURFACE TO BE FREE OF PITS, SCRATCHES, DIRT AND OTHER IMPERFECTIONS.
3. CHEMICAL FILM PER MIL-C-5541 TYPE II, CLASS 3.
4. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS SHOWN ABOUT CENTER LINE ARE SYMMETRICAL.
5. FRONT SURFACES AND EDGES - FINISH COAT TO MATCH COLOR PER FEDERAL STD-595B. BACK SURFACE IS TO BE FREE OF PAINT AND OVER SPRAY. PAINT: POLANE T PLUS F63VXA5426/4323 (COOL GRAY #7). FINISH: CODE VF TEXTURE

HOLE TABLE

HOLE	DESCRIPTION	QTY.
A	0.156 DIA	4
B	SEE DETAIL B	4
C	0.206 DIA	4

Q		MATERIAL: ALUMINUM 0.125 THK. 5052-H32	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SIGNATURE DWN. <i>Ernesto Rodriguez</i>	DATE 3/18/2000	DRANETZ-BMI EDISON, NEW JERSEY U.S.A.	
G		FINISH: SEE NOTES	TOLERANCES	APP.		PANEL, RACK MOUNT S/M	
G			BASIC DIMENSION	DECIMALS 2 PLACE 3 PLACE	FRACTIONS ± 1/64	SIZE	CODE IDENT. No.
G			UNDER 6	± .02 ± .005	± 1/32	D	23207
G1	116556-G1	55XX	6-24 INCL	± .03 ± .010	± 1/16	116557-G1	REV. A
GROUP	NEXT ASSEMBLY	UNIT USED ON	COMPL TOL APPLY TO STK SIZES	OVER 24	± .06 ± .015	SCALE: 1/1	SHEET: 1 OF 1
	APPLICATION		ANGLES ±1/2	FILE NAME: 116557A	EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT, THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DRANETZ-BMI AND ARE ISSUED IN STRICT CONFIDENCE, AND SHALL NOT BE REPRODUCED, OR COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT PERMISSION.		